

532 Series

Temperature Display for J, K and N Thermocouples

Features

- Compact and Low-Cost Temperature Display
- Temperature Display in °C or °F
- MIN/MAX Value Retention
- EEPROM Data Backup on Power Failure
- Galvanic Isolation with Reverse Polarity Protection
- Screw Terminal Connectors: pitch 5 mm
- Display Hold Input
- 5 Measurements/second



- J, K, N Thermocouples with External or Internal Cold Junction Compensation
- Easy Programming and Operation

Specifications:

Supply voltage: 10-30 V DC, galvanically isolated with reverse polarity protection

Current draw: max. 40 mA

Display: 5-digit display, red 7-segment LED's; height 8 mm

Measuring rate: 5 measurements/second

Display refresh: 1-2 times per second

Data backup: EEPROM

Housing: housing for control panel 48 x 24 mm acc. to DIN 43 700; RAL 7021, dark grey

Ambient temp.: -20 to +65 °C

EMC: according to EC EMC directive 89/36/EEC

Interference emissions: EN 50081-2/EN 55 011 Class B

Interference resistance: EN 6100-6-2

Protection: NEMA4 / IP65 (front)

Weight: app. 50 g

Input: Thermocouple Sensor
J (Fe-CuNi)
K (Ni-CrNi)
N (NiCrSi-NiSi)
with sensor breakage monitoring

Control inputs: High: 4-30 V DC, Low: 0-2 V DC

Supply current: 1 mA

Supply line: 2-wire: max 20 Ω, programmable 3-wire, 4-wire: max 20 Ω, no balancing required

Temp. ranges: according to DIN IEC 584

J (Fe-CuNi)	-210.0 °C to +1200.0 °C
	-346.0°F ... +2192.0 °F
K (Ni-CrNi)	-200.0 °C ... +1372.0 °C
	-328.0 °F ... +2501.6 °F
N (NiCrSi-NiSi)	-200.0 °C ... +1300.0 °C
	-328.0 °F ... +2370.0 °F


Resolution: 0.1°C (0.1°F) or 1°C (1°F)

Linearity error: < 0.4 % for entire measuring range at an ambient temperature of 20 °C

Cold junction error: ±1.0 °C typ. ±3.0 °C

Temp. drift: 0.1 K/Kambient

Wiring:

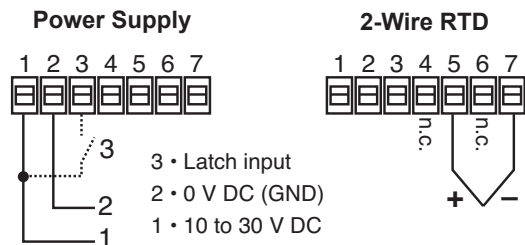

Order #:

532 = Temperature Display with thermocouple Input

Accessories

N7 - Explosion proof housing (see accessories section)

E200 - Outdoor Enclosure (see accessories section)

32DINRAIL - DIN Rail Mounting Frame

DR-4 - 4" DIN Rail

Panel Cutout: 0.876" x 1.78" (22.3 x 45.2mm)
or 0.99" x 1.97" (25 x 50mm) with adaptor provided

