

HR76

Hour Meter

Features

- 6-digit hour meter for round panel cut out
- Low cost
- High shock resistance
- Low power consumption
- Small dimension
- magnified figures
- waterproof
- Protection: NEMA4/IP 65
- Data retention if power is lost
- UL-approval

Applications:

general timing, utility vehicles, construction machines, generators, fork-lift trucks, car washes, outside areas

Specifications:

| | |
|------------------------|---|
| Electrical connection: | Flat pins 0.8 x 6.3 |
| Power consumption: | AC max. 0.4 VA 12 V DC: max. 0.08 W 48 V DC: max. 0.7 W |
| Rated voltages: | 115/230 V AC, $\pm 10\%$, 50/60 Hz, 10 ... 80 V DC |
| On time: | 100 % |
| Display: | 6 (99999.9 h) |
| Time mode: | adding |
| Height of figures: | 3.5 mm |
| Colour of figures: | white on black |
| Reset: | no |
| Ambient temperature: | -30 ... +65 °C |
| Mounting position: | any |
| Protection: | NEMA4/IP 65 |
| Housing: | Plastic |
| Weight: | HR 76.1: 56 g HR 76.2: 54 g |
| Options: | Accuracy: < 0.02% over the full range |
| Approvals: | UL |




HR76.1




HR76.2

Dimensions:

HR76.1

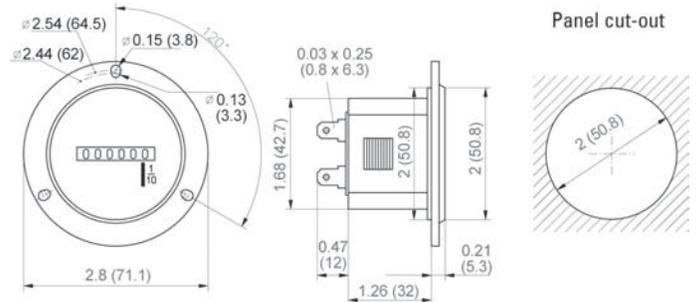

HR76.2

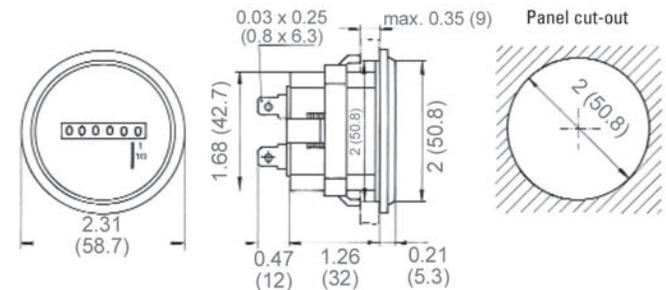

How To Order

EXAMPLE: HR76.1 1

Series

HR76.1
HR76.2

Operating Voltage

1 = 10-80 VDC
2 = 115 VAC
3 = 230 VAC