

K198 Timer Module

LCD time modules	Max. time range 99999.9 h (DC)	K198
-------------------------	---------------------------------------	-------------



The timer module of the type K198 with 6-digit LCD display for PCB mounting features a wide voltage range from 8 to 28 V DC.

It is extremely robust and suitable for many different applications thanks to its wide temperature range.

Timer	DC 8 ... 28 V	PNP	High shock resistance	Temperature range - 40° + 85°	PCB mount	LCD display 6 LCDs	Electrical reset

Powerful

- Display range up to 99999.9 hours.
- 6-digit LCD display, 5 mm high.
- Low power consumption.
- Wide voltage and temperature range.
- Very high shock and vibration resistance.

Simple

- Non-volatile memory (no battery).
- Start/Stop input.
- Electrical reset.
- Very high reliability.
- Small size and low cost.

Order specifications

Order no.

K198

Description

LCD PCB Mount Hour Meter
8 to 28 VDC power supply

Delivery specification

- LCD counter module type K198
- Operating instructions


K198 Timer Module

LCD time modules	Max. time range 99999.9 h (DC)	K198
-------------------------	---------------------------------------	-------------

Technical data

General technical data		Mechanical characteristics	
Display	6 digits, LCD display, figure height 5 mm [0.20"]	Housing	dimensions 18.4 x 32.4 mm [0.72 x 1.28"] color black
Display range	99999.9 h	Weight	approx. 8 g [0.28 oz]
Data backup	CMOS EEPROM non-volatile memory up to 10 years (without battery)	Vibration resistance acc. to DIN-IEC 68-2-6	10 ... 80 m/s ² , 10 ... 75 Hz
Operating / working / storage temperature	-40°C ... +80°C [-40°F ... +185°F] (non-condensing)	Inputs	
Humidity	95 % RH at +32°C [+90°F] for max. 2 hours	Start/Stop input (Enable input timer)	8 ... 28 V DC On-times smaller than 16 sec will not be counted
Electrical characteristics		Reset input	8 ... 28 V DC pulse length min. 500 ms
Power supply	8 ... 28 V DC		
Current consumption	3 mA max. at 4.5 V DC 10 mA at 28 V DC		
EMC standards	EN 55011 class B EN 61000-6-2, EN 61000-6-3 EN 61326-1, EN 61326-3-1		
The module must be protected against inductive voltage spikes and high energy noise interference.			

Terminal assignment

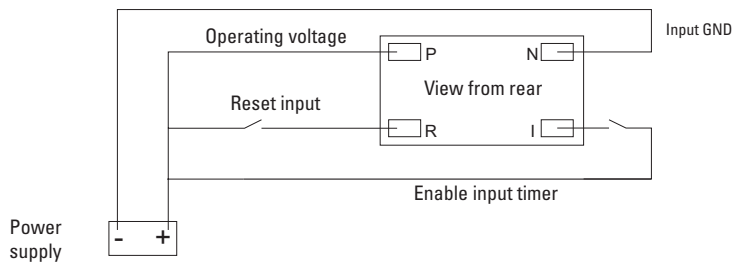

Dimensions

Dimensions in mm [inch]

