

SLEEK series

SLEEK-8

8" industrial display with touch screen

Features:

- 8" TFT LCD Resistive touch window, projected capacitive touch
- Aluminum die casting enclosure
- Front bezel NEMA4/IP65 rating
- Rear side OSD
- Wide Range Power Input DC 9~36V

Specifications:

IO Port	
VGA	1
DVI	1
HDMI	None
DP	None
S_Video	None
OSD Control Membrane	5 keys
Others	USB interface for touch, RS-232 is optional. 1 x optional tack switch for VGA/DVI switching 1 x Line in by phone jack for option
Power	3 pins terminal block
Display	
Display type	8" TFT LCD
Max. resolution	800 x 480
Max. color	16.2M
Luminance(cd/m ²)	350
Viewangle(H°/V°)	140/125
Contrast	500:1
Backlight lifetime(hrs)	40000
Touch Screen(Optional)	
Type	Resistive touch window, optional projected capacitive touch
Interface	USB/RS-232 for Resistive touch, USB for projected capacitive touch
Light transmission(%)	80% for resistive touch , 90% for projected capacitive touch



Power	
Power input	9~36V DC
Mechanical	
Construction	Aluminum Die-casting chassis
IP rating	IP65 front bezel
Mounting	Panel mounting, VESA 75 x 75
Dimension(mm)	231 x 176 x 51
Net weight(Kgs)	1.8
Environment	
Operating temperature(°C)	0~50°C
Storage temperature(°C)	-20~60°C
Storage humidity	10 to 90% @40°C Non-condensing, without touch screen
Certification	CE/FCC Class A

Ordering Information:

Order No	Description
Sleek-8	8" Industrial Die-cast Display with Touchscreen




Kessler-Ellis Products

10 Industrial Way East • Eatontown, NJ 07724

Phone: (732) 935-1320 or (800) 631-2165 • Fax: (732) 935-9344

www.kep.com

Dimensions:

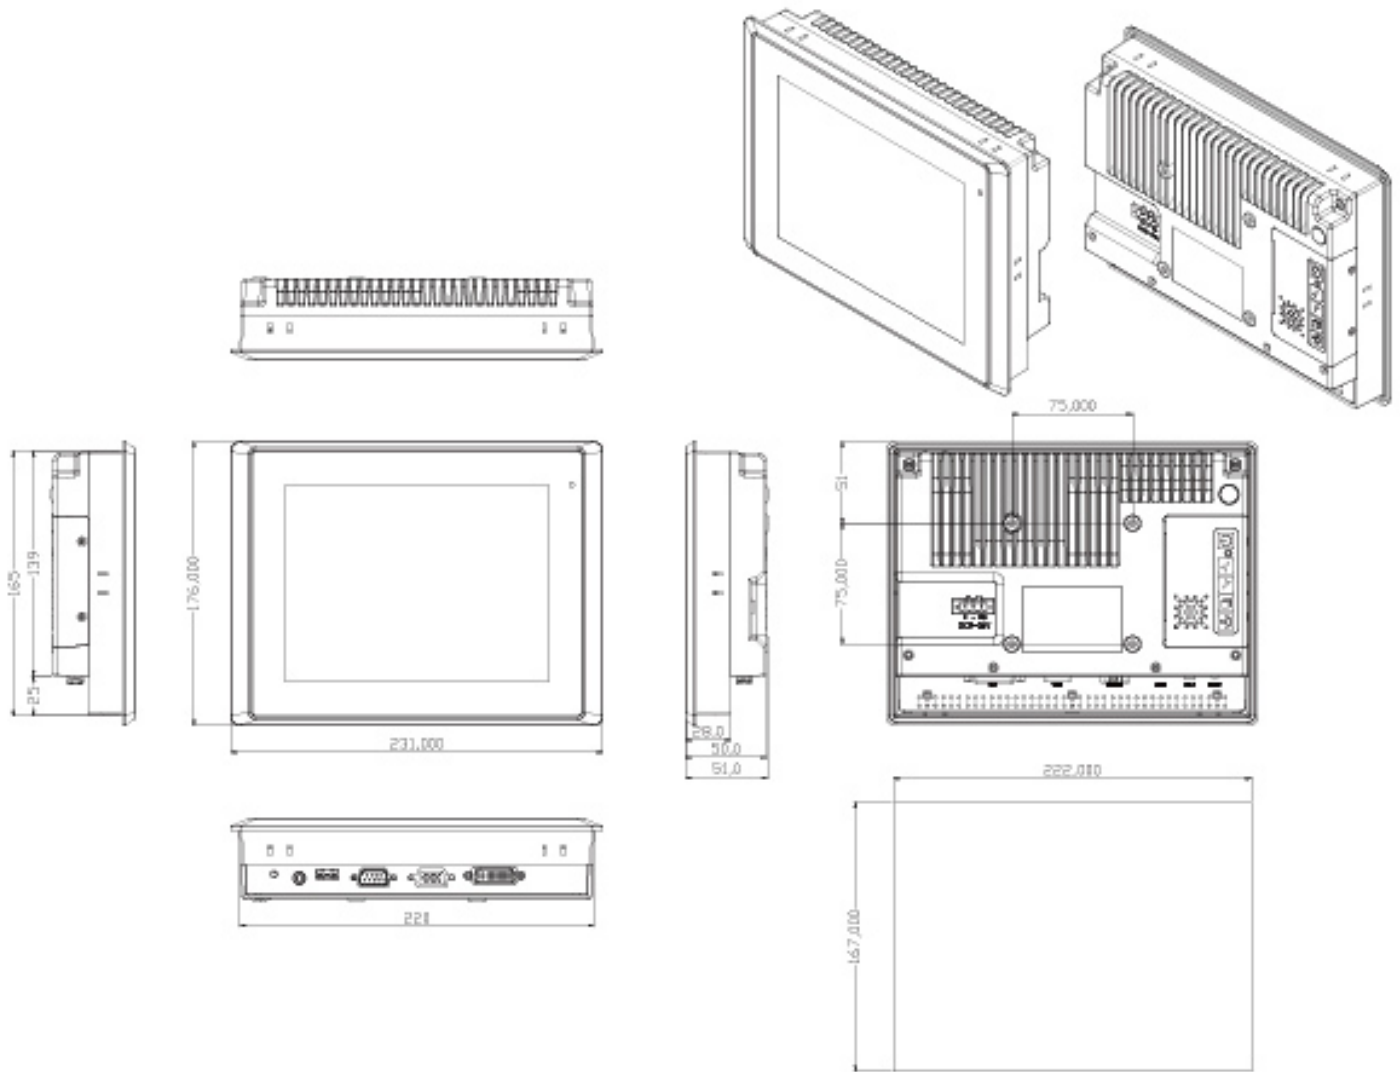

Mounting Hole Size



Kessler-Ellis Products

10 Industrial Way East • Eatontown, NJ 07724

Phone: (732) 935-1320 or (800) 631-2165 • Fax: (732) 935-9344

www.kep.com