

MS-722 MPP-2400N

Wall Mount External Modem

Features

- Operates on All Telephone Lines
- RS-232 Powered from SUPERtrol-II
- 2400 BPS Operation
- Automatic Fallback
- Compatible with All Communications Software Including: TROLink Remote Metering Software
- Compatible with SUPERtrol 1LE, 1 & 2, LEVELtrol II Families
- Automatic Answer
- Tone & Pulse Dialing
- Wall Mount Enclosure with Locking and Sealing Provisions
- FCC Approved

Description:

The MS722MPP-2400N Modem is compact and easy to install. It needs no batteries or AC power because it's designed to run on the DC power provided from the SUPERtrol (with modem power option "M") interface to which it attaches.

The Modem operates at speeds up to 2400 bps. If you are connected to a slower speed modem on the other end of the line, the MPP-2400 automatically "falls back" to match the speed of the slower modem so your data transmission is not interrupted.

The MS722MPP-2400 also features automatic answer, so it can operate unattended.

It will operate over rotary or push-button lines since it works in tone or pulse dialing modes.


The Modem is very small and simple to install. It offers an RJ-45 connector for your RS-232 port connection and an RJ-11 jack for your telephone cabling. An extra RJ-11 jack is provided to permit the connection of a portable telephone.

The MS722MPP-2400 complies fully with the Hayes Standard AT Command Set and the ITU V.22 bis and V.22 standards, as well as Bell 103 and Bell 212A protocols.



SPECIFICATIONS:

Operation:	Full- or Half-Duplex
Standards:	ITU V.22, V.22 bis, Bell 103/212A
Interface:	RS-232/V.24
Baud Rate:	2400, 1200, 300 bps
Command Set:	AT compatible
Dialing:	Tone and Pulse
Transmit Level:	-12 dBm
Receive Sensitivity:	-70 dBm
Dropout Level:	-43 dBm
Operating Temp.:	32 to 104 °F (0 to 40 °C)
Storage Temp.:	-40 to 212 °F (-40 to 100 °C)
Humidity:	10 to 95% (non-condensing)
Connectors:	(1) RJ-45, (2) RJ-11 female
Power:	7-12VDC (RS-232 pins 8 & 9, 75mA)
Size:	8.97" H x 7.86" W x 5.38" D
Weight:	1 lb.

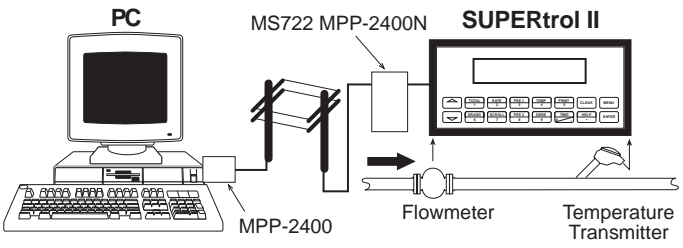

Flow Instruments
COMMUNICATION SOLUTIONS

Ordering Information

EXAMPLE MS722MPP2400N
 Series _____
 MS722MPP-2400N Wall Mount, External Modem